



genesis
NP

NP18-12B
NP18-12BFR


*Sealed Rechargeable
Lead-Acid Battery*

12V, 17.2Ah

Specifications


- **NOMINAL VOLTAGE:** 12V
- **NOMINAL CAPACITY:**
 - 20 hr. rate of 0.86A to 10.5V 17.2Ah
 - 10 hr. rate of 1.6A to 10.5V 16.0Ah
 - 5 hr. rate of 2.9A to 10.2V 14.5Ah
 - 1 hr. rate of 10.3A to 9.60V 10.3Ah
- **WEIGHT (approx.):** 6.2 kgs (13.70 lbs)
- **ENERGY DENSITY (20 hr. rate):** 90 WH/litre (1.47 WH/cubic inch)
- **SPECIFIC ENERGY (20 hr. rate):** 33.28 WH/kg (15.1 WH/lbs)
- **INTERNAL RESISTANCE OF CHARGED BATTERY:** 11 milliohms (approx.)
- **MAXIMUM DISCHARGE CURRENT WITH STANDARD TERMINALS:** 150 amperes
- **MAXIMUM SHORT-DURATION DISCHARGE CURRENT:** 450 amperes
- **OPERATING TEMPERATURE RANGE:**
 - CHARGE -15°C to 50°C (5°F to 122°F)
 - DISCHARGE -20°C to 60°C (-4°F to 140°F)
- **CHARGE RETENTION (shelf life) at 20°C (68°F):**
 - 1 month 97%
 - 3 months 91%
 - 6 months 85%
- **LIFE EXPECTANCY:**
 - STANDBY USE 3 to 5 years
 - CYCLE USE (approx.):
 - 100% depth of discharge 250 cycles
 - 50% depth of discharge 550 cycles
 - 30% depth of discharge 1200 cycles
- **SEALED CONSTRUCTION:** Can be operated in any position without leakage.
- **STANDARD TERMINAL:** Bolt fastened terminal
- **HOUSING MATERIAL:** ABS Resin
- **OPTIONAL:** Container and cover made from Flame Retardant ABS (UL94-V0/L.O.I.>28%)
- **HARDWARE:** 2-M5-.8 x 12mm Bolt w/nuts, lock washer & flat washer

Terminal

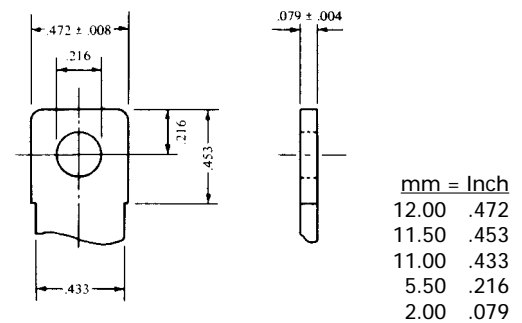

Dimensions: mm (Inches)

Dimensions

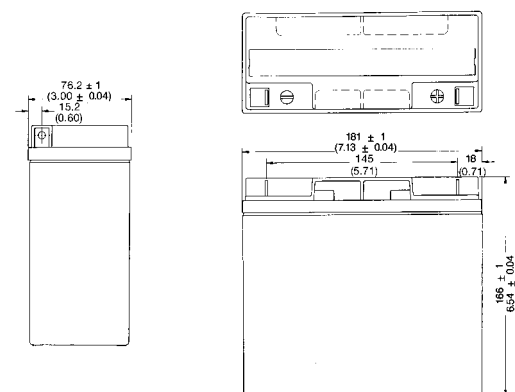

Dimensions: mm (Inches)




RECOGNISED BY UL, File No. MH 16464


EnerSys

Power/Full Solutions™


DISCHARGE CHARACTERISTIC CURVES AT 25°C (77°F)

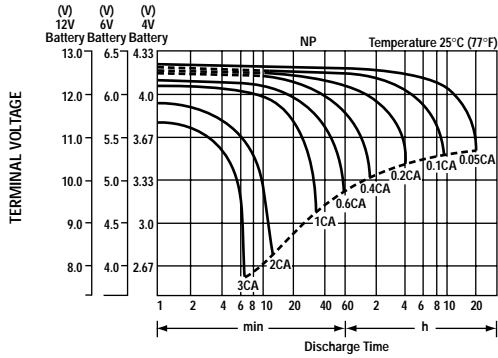


TEMPERATURE EFFECTS IN RELATION TO BATTERY CAPACITY

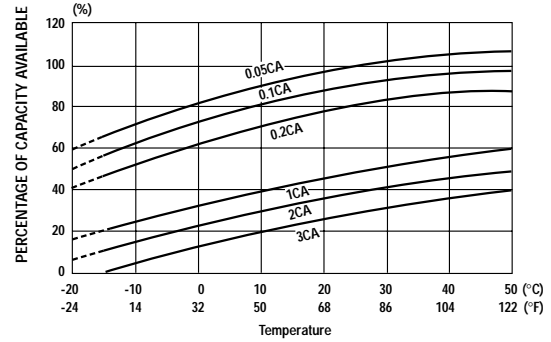


SELF DISCHARGE CHARACTERISTICS

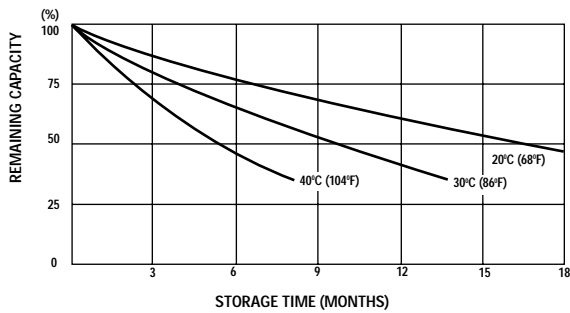


OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

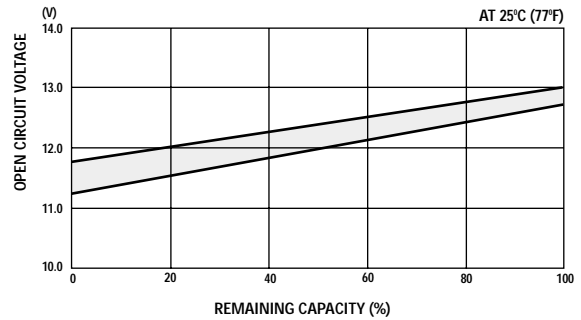

CYCLE SERVICE LIFE IN RELATION TO DEPTH OF DISCHARGE

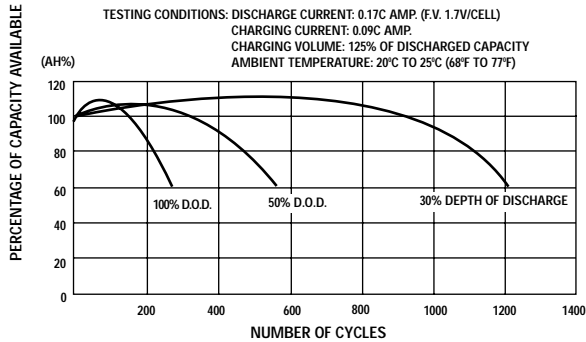

FLOAT SERVICE LIFE

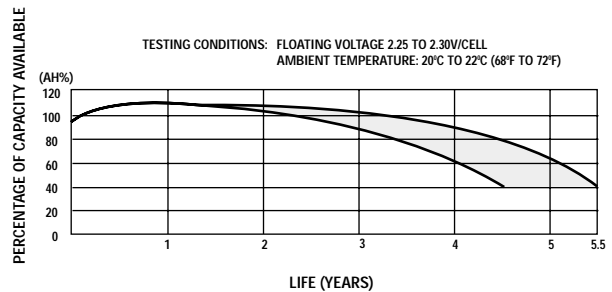

Consult EnerSys before discharging the battery with a current in excess of 3C.

CHARGING METHODS (At 20°C)

Cycle use: Maximum charging current 4.3A
 Charging voltage 14.4 to 15.0V

Standby use: Float charging voltage 13.50 to 13.80V

CAUTION

- Avoid short circuit
- Do not charge in a sealed container.



EnerSys Inc.
 P.O. Box 14145
 Reading,
 PA 19612-4145
 USA
 Tel: +1-610-208-1991
 +1-800-538-3627

Hawker Limited
 Rake Lane
 Clifton Junction
 Manchester M27 8LR
 UK
 Tel: +44 (0)161 794 4611
 Fax: +44 (0)161 793 6606

Represented by: